




## CEF-D Series Centrifugal Fan

Suitable for ventilation and smoking fumes in kitchen, hotels, restaurants, factories and mining enterprises and public places, it also can be suitable for grain machinery, chemical machinery, plastic machinery and other production equipment.

- Iron Housing, high temperature resistance
- Size from 150 to 400 mm
- Capacities to 6500 m<sup>3</sup>/h
- Static pressure up to 1300 Pa
- Single suction, high speed fan
- Three adjustable air outlet angles  
90, 180, 0 Degree
- Low noise level and easy installation
- High temperature copper wire motor
- Maximum operating temperature 120°C
- Speed controllable

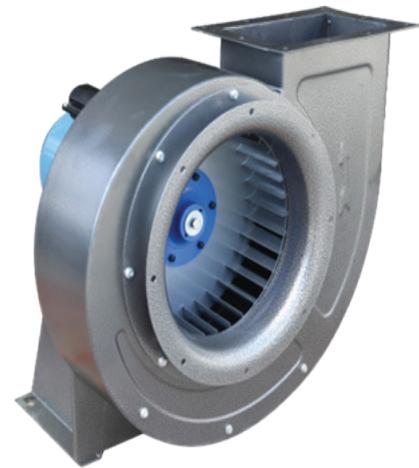

Technical Data								
Model	Voltage (V)	FREQUENCY (Hz)	POWER (KW)	REVOLUTION (rpm)	FLOW (m <sup>3</sup> /h)	dB (A)	Motor Protection	Insulation Class
CEF-D150	240/380	50	0.37	2900	1180	53	IP55	H
CEF-D200	240/380	50	0.37	1450	1235	55	IP55	H
CEF-D250	240/380	50	0.75	1450	2500	60	IP55	H
CEF-D300	240/380	50	1.1	1450	3550	70	IP55	H
CEF-D350	240/380	50	3	1450	5100	70	IP55	H
DEF-D400	240/380	50	4	1450	6500	72	IP55	H

