




CEF-N Series Centrifugal Fan

Suitable for ventilation and smoking fumes in kitchen, hotels, restaurants, factories and mining enterprises and public places, it also can be suitable for grain machinery, chemical machinery, plastic machinery and other production equipment.

- Iron Housing, high temperature resistance
- Size from 150 to 400 mm
- Capacities to 6500 m³/h
- Static pressure up to 1300 Pa
- Single suction, high speed fan
- Three adjustable air outlet angles
90, 180, 0 Degree
- Low noise level and easy installation
- High temperature copper wire motor
- Maximum operating temperature 120°C
- Speed controllable

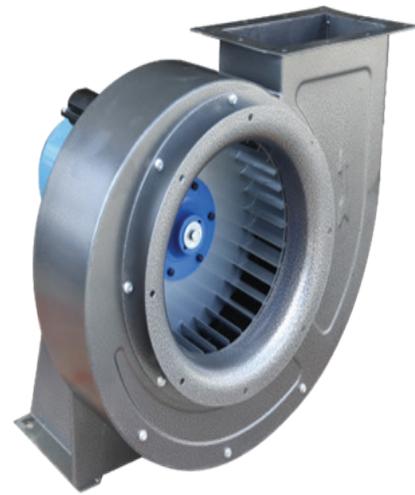

Technical Data								
Model	Voltage (V)	FREQUENCY (Hz)	POWER (KW)	REVOLUTION (rpm)	FLOW (m ³ /h)	dB (A)	Motor Protection	Insulation Class
CEF-N28	240/380	50	0.75	1450	3100	67	IP55	H
CEF-N30	240/380	50	1.5	1450	4570	73	IP55	H
CEF-N32	240/380	50	2.2	1450	6566	74	IP55	H
CEF-N35	240/380	50	3	1450	8370	78	IP55	H

